

NBF-4B2015-ER

Full HD Network Mini Dome Camera

Features

- 1 / 2.8" Progressive Scan CMOS sensor
- Quad Stream support
- Wide Dynamic Range
- Smart Picture Quality / 3D Noise Reduction
- Powered by Power-Over-Ethernet (PoE)
- Support MicroSD card storage
- Support up to 25m IR LED module




| NBF-4B2015-ER | | | |
|--------------------|----------------------|------------------------|--|
| Camera | Image Sensor | | 1/2.8" Progressive Scan CMOS |
| | Effective Pixels | | 1920(H) x 1080(V) |
| | Minimum Illumination | | 0.2 lux @ Color 0.02 lux @ B/W @ 30 IRE |
| | FOV | | 71.8° |
| | Shutter Speed | | 1~ 1/10000 sec. |
| Lens | Lens Type | | F1.8 / f = 3.6 mm |
| Operation | Video Compression | | H.264 / MJPEG |
| | Video Streaming | Dual Stream | Simultaneous H.264 1080p (13/15 fps) + MJPEG D1 (25/30 fps) Simultaneous H.264 1080p (13/15 fps) + H.264 D1 (25/30 fps) |
| | | Quad Stream | Simultaneous H.264 + H.264 + H.264 + H.264 (Frame rate selectable) Simultaneous H.264 + H.264 + H.264 + MJPEG (Frame rate selectable) |
| | Resolution | H.264 | Full HD 1080p/ SXGA/ HD 720p/ XGA/ SVGA/ D1/ VGA/ CIF |
| | | MJPEG | Full HD 1080p/ SXGA/ HD 720p/ XGA/ SVGA/ D1/ VGA/ CIF |
| | Image Setting | Brightness | Manual |
| | | Exposure | Auto / Manual |
| | | Sharpness | Manual |
| | | Contrast | Manual |
| | | White Balance | Auto / Manual / ATW / One Push |
| | | Saturation | Manual |
| | | Hue | Manual |
| | | Backlight Compensation | On / Off |
| | | Digital Zoom | Support |
| | | WDR | On / Off |
| | | 3D Noise Reduction | On / Off |
| | | Motion detection | On / Off / By Schedule |
| | | Privacy Mask | On / Off |
| | Privacy Mask Type | Color | |
| | Tampering Alarm | On / Off / By Schedule | |
| Event Notification | | HTTP, FTP, SMTP | |
| Languages | | English, Chinese | |

NBF-4B2015-ER

| | | | |
|---------------|-------------------------|------------------|---|
| Network | Interface | | 10/100Mbps Ethernet (RJ-45) |
| | Protocol | | IPv4/ v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP,FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF, ARP |
| | Password Levels | | User and Administrator |
| | Security | | HTTPS, IP Filter, IEEE 802.1X |
| | Internet Browser | | Internet Explorer (6.0+), Chrome, Firefox, Safari |
| | User Account | | 20 |
| Mechanical | Built-in IR Illuminator | Working distance | Up to 15m |
| | | Wavelength | 850nm |
| | | Number of LEDs | 18 |
| | | Ethernet | RJ-45 |
| | | Micro SD | MicroSDHC 32GB support |
| LED Indicator | | Power, Link, ACT | |
| General | Operating Temperature | | -10° C – 50° C (14° – 122° F) Humidity: 10% to 90%, No Condensation |
| | Power Source | | PoE |
| | Power Consumption | | System: 2.5W / Built-in IR Illuminator: +1.3W |
| | Dimension | | Ø 71.5 x 100 mm (2.815 x 3.94 inches) |
| | Weight | | 0.33 kg |

Dimensions:

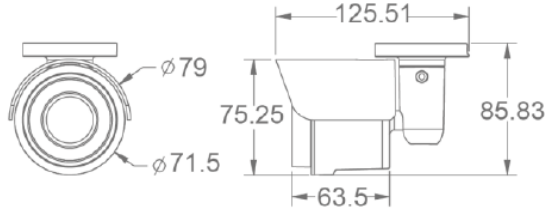

(Certis, may at any time and without notice, make changes or improvements to the products and/or cease producing or commercializing them.) The Certis logo and trademark are the property of Certis Technology International Pte. Ltd.

Authorised Dealer /Representative

certis